

# B400SLF Status Beacon [Filament Lamp]

The B400 series comprises Xenon strobe beacons, permanent filament bulb or halogen beacon, blinking filament bulb or halogen beacon, rotating halogen beacon and a multi-function LED array beacon.

The surface mount base can also be supplied with a right angle bracket or with a pole mounted assembly.


## Features

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- Multiple cable entries.

## Approvals

- GOST-R certificate: POCC GB.JB05.H00144.



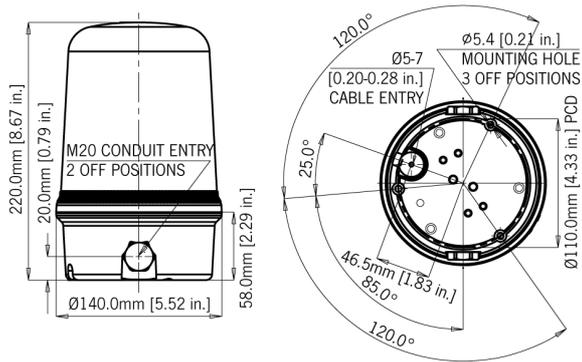

### Specification

|                     |   |
|---------------------|---|
| Light source:       | Filament lamp E14   |
| Light output:       | 40W   |
| Function:           | Permanent   |
| Candela:            | 27 cd* (peak/effective intensity)                               |
| Lens colours:       | Amber, Blue, Clear, Green, Red & Yellow                         |
| Lens type:          | Prismatic (standard) or plain                                   |
| Mounting:           | Surface mount (right angle or pole mount accessories available) |
| Entries:            | 1 x 5-7mm push through grommet<br>2 x M20 cable entry           |
| Dimensions:         | ø140 x 220mm  |
| Ingress protection: | IP65  |
| Housing material:   | High impact UL94 V0 (f1) PC                                     |
| Lens material:      | High impact UL94 V0 (f1) PC                                     |
| Terminals:          | 1.5 mm <sup>2</sup> flying lead assembly                        |
| Operating temp:     | -25 to +50°C  |
| Storage temp:       | -40 to +70°C  |
| Relative humidity:  | 90% at 20°C.  |
| Weight:             | 535g  |

\*Candela measurements representative of performance with clear lens at optimum voltage.

### Part Codes

| Version:          | Wattage:   | Part code:       |
|-------------------|--|------------------|
| 12-250V           | 40W  | B400SLF2 50B/[x] |
| [x]= Lens colour: | A: Amber<br>B: Blue<br>C: Clear<br>G: Green<br>R: Red<br>Y: Yellow |                  |

Note: Filament lamp not included - must be ordered separately.

### Current Consumption

| Version: | Current m A: |       |
|----------|--------------|-------|
| 12V dc   | 3.1A         |       |
| 24V dc   | 2.05A        |       |
| 115V ac  | 50/60Hz      | 321mA |
| 230V ac  | 50/60Hz      | 178mA |

**AUTHORIZED DISTRIBUTOR:**  
**GasDetectorsUSA.com**  
**Houston, Texas USA**  
**sales@GasDetectorsUSA.com**  
**832-615-3588**