

# STA2 Alarm Horn with Xenon & LED Tower

The STA2 is a customisable audio-visual signal featuring a tower of 2 AlertAlight L101 type beacons combined with a SONF1 alarm sounder.


Each beacon position can contain either a Xenon or high output L.E.D. light source. The STA2 assembly features a pre-wired junction box and cable loom enabling the end user to determine beacon type and position during installation.


## Features

- SONF1 alarm sounder synchronises automatically on multi-unit systems.
- Multiple configurations of Xenon and L.E.D. beacons.
- Internal cable loom and termination PCB simplifies installation.
- Common negative/neutral supply minimises cabling.
- High output L.E.D. unit can be set to steady or flashing.
- Available with red, white or grey housing.
- Sealed to IP66.
- Tropicalisation available on request.
- Also available without SONF1 audible signal – see the STB2/3/4 data.

## Approvals

- UL & cULs approved: General signalling use.
- EAC compliant: RU D-GB.AL16.B.11083

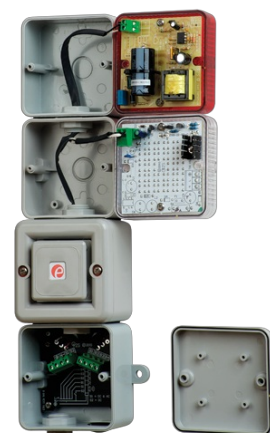

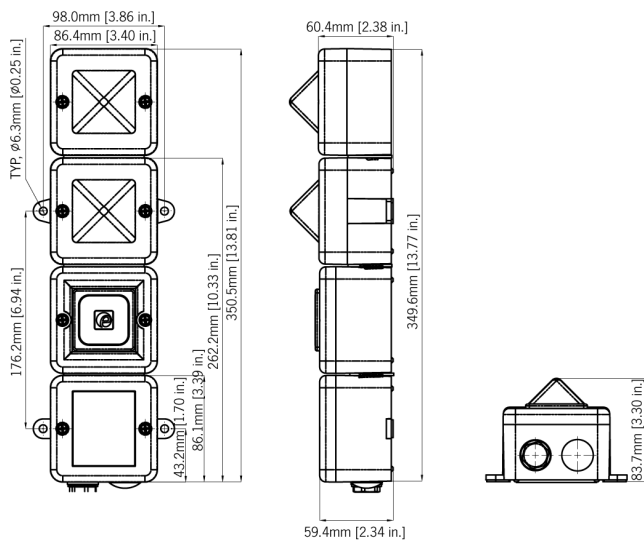

## Specification

### General:

Cable entries: 2 x M20 clearance

Ingress Protection: IP66

Housing material: UL94V0 & 5VA FR ABS

Housing colour: RAL3000 Red, RAL7038 Grey and White

Lens material: PC

Fixings: Stainless Steel

Operating temp: -25° to +55°C [-13° to +131°F]

Storage temp: -40° to +70°C [-40° to +158°F]

Relative humidity: 90% at 20°C [68°F]

STA2 Weight: 0.95kg/2.09lbs

STA3 Weight: 1.15kg/2.53lbs

STA4 Weight: 1.35kg/2.97lbs

### SONF1 - Alarm

#### Sounder:

Maximum output: 100dB(A) @ 1 metre [91dB(A) @ 10ft/3m]

Nominal output: 99dB(A) @ 1m +/- 3dB - Tone 1 [90dB(A) @ 10ft/3m]

No. of tones: 10 (UKOOA / PFEER compliant)

No. of stages: 2 (AC voltage variants 1 stage)

Volume control: On board potentiometer

Effective range: 30m/99ft @ 1KHz

Monitoring: Reverse polarity diode protection on DC units.

Terminals: 0.5 to 1.5mm<sup>2</sup> cables.

### L 101X - Xenon:

Energy: 5 Joules (5Ws)

Flash rate: 1Hz (60 fpm)

Peak Candela: 500,000 cd - calculated from energy (J)

Effective Intensity 250 cd - calculated from energy (J) cd:

Peak Candela: 86,935 cd\* - measured ref. to I.E.S.

Effective Intensity 200 cd\* - measured ref. to I.E.S. cd:

Terminals: 0.5 to 4.0mm<sup>2</sup> cables.

Lens colours: Amber, Blue, Clear, Green, Opal, Red, Yellow

Tube life: Emissions are reduced to 70% after 8 million flashes

### L 101H - L.E.D.:

## Part Codes

Version:	Description:	Voltage:	Part code:
STA2	Junction box & SONF1 assy for 2 x L101 beacons	12/24Vdc	STA2DC024[x]
STA2	Junction box & SONF1 assy for 2 x L101 beacons	115Vac	STA2AC115[x]
STA2	Junction box & SONF1 assy for 2 x L101 beacons	230Vac	STA2AC230[x]

[x]: G=Grey, R=Red, W=White

Version:	Description:	Voltage:	Part code:
ST-L101X	L101 Xenon Beacon 5J	12Vdc	ST-L101XDC012[x]
ST-L101X	L101 Xenon Beacon 5J	24Vdc	ST-L101XDC024[x]
ST-L101X	L101 Xenon Beacon 5J	115Vac	ST-L101XAC115[x]
ST-L101X	L101 Xenon Beacon 5J	230Vac	ST-L101XAC230[x]
ST-L101H	L101 L.E.D. Beacon	10-30Vdc	ST-L101HDC030[x]
ST-L101H	L101 L.E.D. Beacon	90-260Vac	ST-L101HAC230[x]

[x]: A=Amber, B=Blue, C=Clear, G=Green, R=Red

Example: For a tower of A SONF1 alarm sounder plus two beacons using two Xenon beacons, one red, one amber plus one L.E.D. beacon in green using a 24Vdc supply in a red housing, order the following part codes:

STA2DC024R  
ST-L101XDC024R  
ST-L101XDC024A  
ST-L101HDC024G

For UL approved version suffix all relevant part codes with 'UL'

### Tone table

<b>S 1</b>	<b>Description</b>	<b>S 2</b>
T 2	500/1200Hz @ 0.3Hz 0.5 sec Slow Whoop	T 1
T 3	1200/500Hz @ 1Hz - DIN / PFEER P.T.A.P.	T 8
T 4	544Hz (100mS)/440Hz (400mS) - NF S 32-001	T 9
T 5	Bell	T 1
T 6	800/1000Hz @ 7Hz Sweeping	T 8
T 7	500-1200Hz 3.75sec /0.25sec. Australian Evac.	T 10
T 8	1000Hz Continuous - PFEER Toxic Gas	
T 9	Continuous 554Hz	
T 10	420Hz @ 0.625 sec Australian Alert	

\4.Where applicable following tones are available on AC voltage versions:

__Stage 1	__Frequency Description
T 1	800/1000Hz @ 0.25 sec Alternating
T 2	500/1200Hz @ 0.3Hz 0.5 sec Slow Whoop
T 3	1200/500Hz @ 1Hz - DIN / PFEER P.T.A.P.
T 4	544Hz (100mS)/440Hz (400mS) - NF S 32-001
T 5	1000Hz Continuous - PFEER Toxic Gas
T 6	Bell
T 7	800/1000Hz @ 7Hz Sweeping
T 8	2400/2900Hz @ 50Hz Sweeping
T 9	420Hz @ 0.625 sec Australian Alert
T 10	500-1200Hz 3.75sec /0.25sec. Australian Evac.