




CP125 Explosion Proof Manual Call Point
CP125 Series



ATEX: II2G Exd IIC T4~T6	Zone 1 & Zone 2	IP66	Stainless Steel
---------------------------------	----------------------------	-------------	------------------------

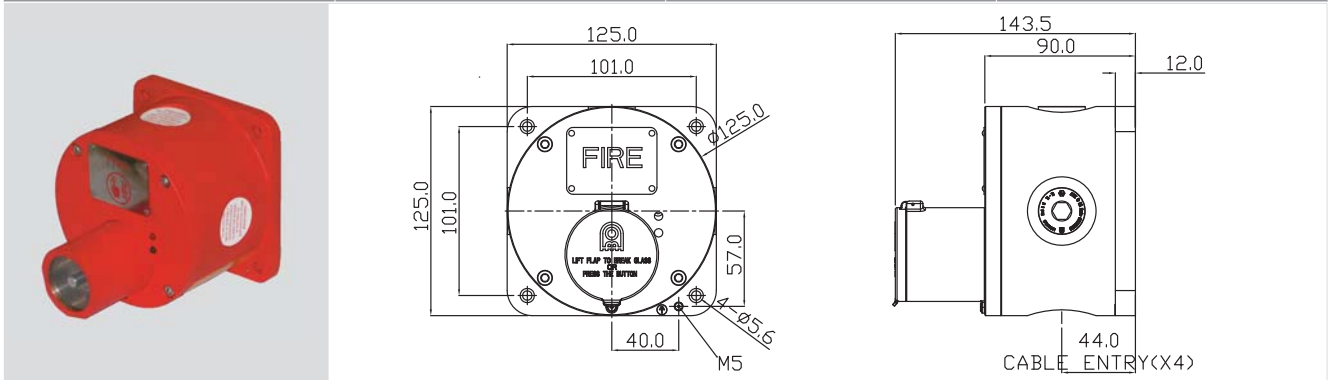

Specification:

Certification:	ATEX: II 2G Exd IIC T4~T6
Ambient Temperature:	-40 to +70 C
Humidity:	Up to 95% RH
Ingress Protection:	IP66
Enclosure Material:	Stainless Steel
Push Button Assembly Material:	Stainless Steel
Enclosure Colour:	Red, Blue, Yellow, Black/Yellow Stripes or Others (Selectable)
Weight:	4.9Kg
Dimension:	L125*W125*H143.5 (mm)
Power Supply:	24V DC or 100-240V AC
Switch Rating:	250V AC- 11A (Resistive), 6A (Inductive) 30V DC- 6A (Resistive), 6A (Inductive)
Output	On-off Output (NC/NO) or 4-20mA DC
Terminals:	Accept up to 2.5mm ² Cable
Cable Entry:	4* M20, M25, 1/2" NPT, 3/4"NPT or Others
Electromagnetic:	CE ₀₄₇₀ Marked

Ordering Code

Products	Switch	Duty Label*	Tag Label*	LED Indicator*	Features*	Entry Size	Finish Color
CP125	S- Single Swith D- Double Switch*	N-NO Y-Yes (Specify Wording)	N-NO Y-Yes (Specify Wording)	L-Red & Green LED R- Red LED G- Green LED N- No LED	F-Flap R-Resistor (Specify) D-Diode (Specify) N- None	A- M20 B- M25 C-1/2" NPT D-3/4" NPT O-Other	R-Red B-Blue Y-Yellow S-Black/Yel-low Stripes O-Others (Specify)

i.e. CP125SNNLFRAR

CP125	S	N	N	L	FR	A	R
Product	Single Swith	No Duty Label	No Tag Label	Red & Green LED	Flap & Resistor	M20 Cable Entry	Red Finish

These * " accessories need to be ordered seperatedly. Please refer to product datasheet for your information.