


CP135N Weather-proof & Heavy Duty Manual Call Point

CP135N Series

IP66	GRP
------	-----

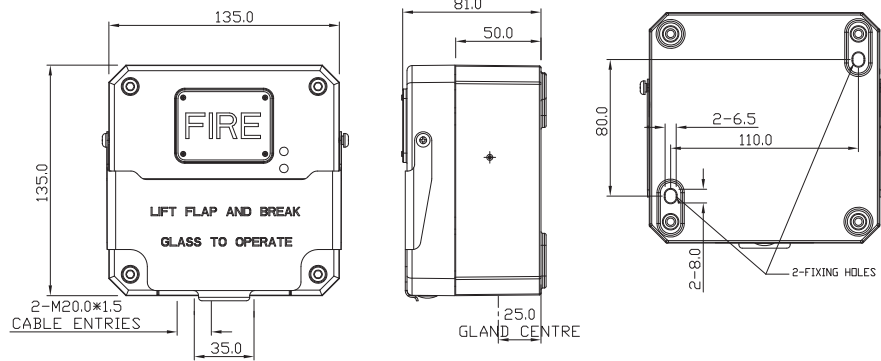

Specification:

Ambient Temperature:	-40 to +70° C
Humidity:	Up to 95% RH
Ingress Protection:	IP66
Enclosure Material:	UV and Corrosion Resistance GRP (Anti Static GRP Optional)
Enclosure Colour:	Red ,Blue, Yellow, Black/Yellow Stripes or Others (Selectable)
Weight:	1.5Kg
Dimension:	L135*W135*H80.5 (mm)
Power Supply:	24V DC or 100-240V AC
Switch Rating:	250V AC- 11A (Resistive), 6A (Inductive) 30V DC- 6A (Resistive), 6A (Inductive)
Output	On-off OUtput (NC/NO) or 4-20mA DC
Terminals:	Accept up to 2.5mm ² Cable
Cable Entry:	2* M20, M25, 1/2" NPT, 3/4"NPT or Others
Electromagnetic:	CE ₀₄₇₀ Marked

Ordering Code

Products	Switch	Duty Label*	Tag Label*	Glass Label**	LED Indicator*	Features*	Entry Size	Entry Size	Finish Color
CP135N	S- Single Swith D- Double Switch*	N-No Y-Yes (Specify Wording)	N-No Y-Yes (Specify Wording)	Y-Glass Label (Standrd)	L-Red & Green LED	F-Flap	A- M20	T-Top Face	R-Red
				N-No Glass Label O-Others (Specify)	R- Red LED	R-Resistor (Specify)	B- M25	B-Bottom Face	B-Blue
					G- Green LED	D-Diode (Specify)	C-1/2" NPT	Y-Yellow	
					N- No LED	N- None	D-3/4" NPT	S-Black/Yel-low Stripes	
						O-Other	O-Others (Specify)		

i.e. CP135NSNNYLFRABR

CP135N	S	N	N	Y	L	FR	A	B	R
Product	Single Swith	No Duty Label	No Tag Label	Standard Glass Label	Red & Green LED	Flap & Resistor	M20 Cable Entry	Cable Entry on Bottom	Red Finish

These * accessories need to be ordered seperatedly. Please refer to product datasheet for your information.

** Standard glass label is "Break Glass Press Here"