


A105NSONTEL Telephone Initiated Alarm Sounder

The A105NSONTEL is a compact, high output, 105dB(A) telephone initiated alarm sounder.

The line powered A105NSONTEL has a choice of three alarm tone frequencies.

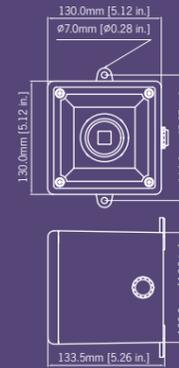

Tones:

Tone 1	Siren Tone
Tone 2	Alternating tone
Tone 3	Sweeping tone

Part codes:

Version:

A105NSONTEL[x]

[x] = Housing colour: G: Grey R: Red W: White

Specification:

Nominal output:	105dB(A) @ 1m +/- 3dB
No. of tones:	3
Volume control:	Max. 105dB(A); Min. 96dB(A)
Effective range:	60m @ 1KHz
Supply:	Direct power from telephone line (REN 1)
Ingress protection:	IP66
Housing material:	High impact UL94 V0 & 5VA FR ABS
Colour:	Red (RAL3000), grey (RAL7038) & white.
Cable entries:	3 x M20 clearance gland knockouts in side & back
Terminals:	0.5 to 2.5mm ² cables.
Operating temp:	-25 to +55°C
Storage tempe:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight :	0.75kg

Features:

- Continuously rated.
- Stainless steel fixings.
- Unit can be mounted using external lugs or internal BESA compatible fixing positions.
- Tropicalisation available on request.

Approvals:

- GOST-R approved. Cert: POCC GB-JB05-H00144

AUTHORIZED DISTRIBUTOR:
GasDetectorsUSA.com
 Houston, Texas USA
 sales@GasDetectorsUSA.com
 832-615-3588