




SB100-2/3/4 Weather-proof Sounder & Beacon (Combination Unit) SB100 Series

IP66/67

PA



SB100N-4J

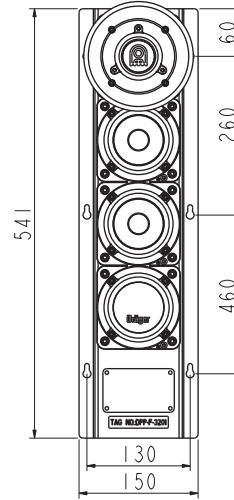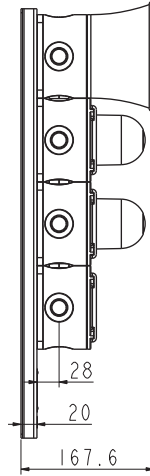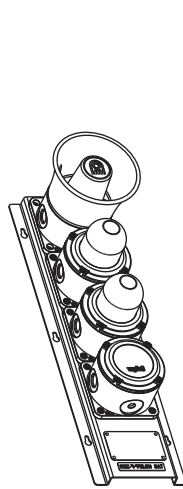

Specification:

Ambient Temperature:	-40 to +70° C
Humidity:	Up to 95% RH
Ingress Protection:	IP66/67
Enclosure Material:	PC (Polycarbonate)
Mounting Plate Material:	Stainless Steel
Lens Cover Material:	Polycarbonate
Lens Colour:	Red, Yellow (Amber), Blue, Green, Clear
Enclosure Colour:	Black or Others (Specify)
Weight:	SB100-4: 2.5 Kg
Dimension:	SB100-4: L541*W150*H167.4 (mm)
Beacon Type Selection:	LED or Xenon
Tube Energy for Xenon:	2,5,10,15,21 Joule for Selection
LED Output:	Yellow Lens Cover-112 Candela; Red-94 Candela; Green-78 Candela; Blue -60 Candela
Status Type:	Flash; Rotary (LED only); Steady (LED only)
Flash Rate:	60/75/120 times/min (Flash once a time);100/120/150 times/min (Flash twice a time) 120/150/180 times/min (Flash three times a time)
Rotary Rate:	Rotary Rate is the same as Flash Rate. Rotary Type can be specially designed to provide LED in four different colors flashing in sequence.
Tone Selection:	63 tones selection incl. 4 free tones for customized or recorded
Sound Output:	Up to 123dB
Power Supply:	212-48V DC/AC or 100-240V AC
Power Consumption:	Sounder: 5-20W (Adjustable); LED Beacon:5W Xenon Beacon:2 Joule-4W (Max); 5J-10W (Max);10J-15W (Max);15J-20W(Max); 21J: 25W(Max)
Working Currenty:	Sounder: 250mA-1500mA; LED Beacon:220mA (Max) Xenon :2 Joule-160mA(Max); 5J-320mA(Max); 10J-650mA(Max); 15 J-1A(Max); 21J-1.4A (Max)
Terminals:	Accept up to 2.5mm ² Cable
Cable Entry:	1/2/3* M12, M16, M20 or Others (Specify)
Electromagnetic:	CE ₀₄₇₀ Marked

To be Continued.....

Ordering Code											
Products	Combination Type	Lens Color	Type	Tube Energy (Xenon Only)	Voltage	Duty Label*	Tag Label*	Entry Size	Entry No.	Entry Location	Finish Color
SB100	2J- 1Sounder, 1 Beacon & 1 Junction Box 2P- 1Sounder, 1 Beacon & 1 Puch Button 3J- 1 Sounder, 2 Beacons & 1 Junction Box 3P- 1 Sounder, 2 Beacons & 1 Puch Button 4J- 1 Sounder, 3 Beacons & 1 Junction Box 4P- 1 Sounder, 3 Beacons & 1 Puch Button	R- Red Y- Yellow B-Blue G-Green C-Clear	L-LED X- Xenon	02-2 Joule 05-5 Joule 10-10 Joule 15- 15 Joule 20-20 Joule	DC- 12-48V DC AC1- 12-48V AC AC2- 100-240V AC	N-NO Y-Yes (Specify Wording)	N-NO Y-Yes (Specify Wording)	A- M12 B- M16 C-M20 O-Other (Specify)	1- 1 Cable Entry 2- 2 Cable Entries 3- 3 Cable Entries	B-Bottom L- Left Side R- Right Side	BL- Black O-Others (Specify)
i.e. SB1004JRXBX05DCNNC2BLBL											
SB100	4J	RX	BX	05	DC	N	N	C	2	BL	BL
Product	1Sounder, 2Beacons & 1 Junction Box	Red Xenon	Blue Xenon	5 Joule	24V DC	No Duty Lable	No Tag Label	M20 Cable Entry	2 Cable Entries	Bottom & Left Side	Black Finish
These " accessories need to be ordered seperately. Please refer to product datasheet for your information.											