

1

SPECTRA B100LDA

Permanent L.E.D. Array Beacon
9 x High powered L.E.D's

IP Rating: IP65

Temp: -25°C to +50°C

Unit weight: 93g
CE

Dimensions : Ø60 x 65.5mm
Cable entry: Plugable 2.5mm² terminals

X = Lens colour

R = Red

B = Blue

Y = Yellow

A = Amber

G = Green

Order code Voltage

B100LDA030B/x 10-30V DC 80mA

B100LDA230B/x 230V AC 32mA

Mountings



Panel mount Ø37mm (PG29)

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
mail : sales@e2s.com web : www.e2s.com



A

SPECTRA B100LDA

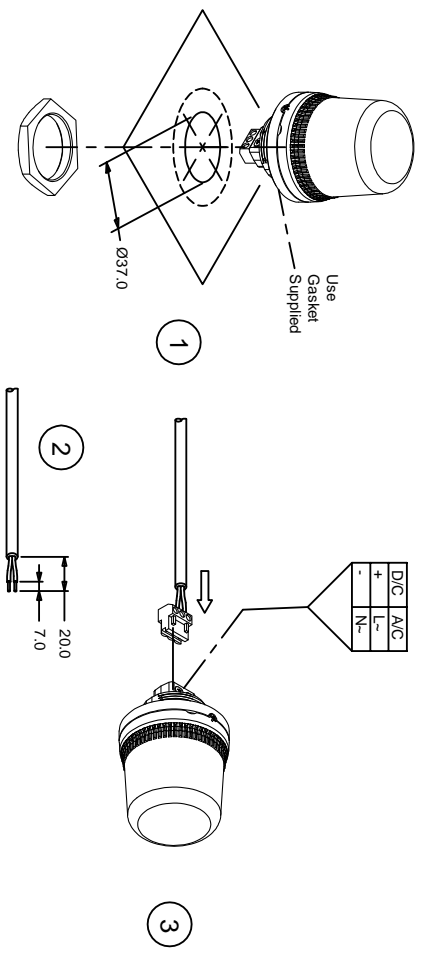

Dimensions in mm



2

ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.

ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

ATTENTION: Lens on unit will be hot allow to cool prior to removal.

